
JUN 8 2004


MSA
AIR MASK
DEPARTMENT OF ENVIRONMENTAL PROTECTION
STATE OF MAINE
JUN 8 2004


JUN 8 2004


MSA
AIR MASK
JUN 8 2004


MSA
Ultravue LT
Air Mask
JUN 8 2004


MSA
Ultralite II
Air Mask
JUN 8 2004


MSA
JUN 8 2004


JUN 8 2004


JUN 8 2004


AIR
.34 kW
21
JUN 8 2004


Bilsom
728
JUN 8 2004


GLASS
PRIORITY 8
24 BOTTLES
INK
9-APR
FROM FREEZING
JUN 8 2004


Pure
Apple-Juice
WINTER HILL
JUN 8 2004


JUN 8 2004


SODIUM SILICATE
LIQUID
CLASS A
SODIUM BORATE
B.R. ELK & CO.
JUN 8 2004


JUN 8 2004


JUN 8 2004

YBDENUM DISU
OWDER LUBRICANT
MIL - M - 7866 A (ASG)
ONTRACT NO. AF 14 (619)-
.- RAY COMPANY,
MADISON, N. J.
TE - 7/57 BATCH
NET CONTENT: 1 LB.

DOW CORNING
HIGH VACUUM GREASE
Silicone LUBRICANT
DOW CORNING CORPORATION • MIDLAND, MICHIGAN, U. S. A.
NET WEIGHT 2 OUNCES

for demountable or movable joints in high vacuum systems.
- Useful at pressures of at least 10⁻⁶ mm.
- Stable from −40° to +400°F.
- Oxidation resistant
- Insoluble in water
- Nontoxic

Made by
DOW CORNING CORPORATION
MIDLAND, MICH., U. S. A.

7300-79897
UTTY TUF-G 24
½ PT UN G
F 14 (604)-2466
IN PAINT & VA O. NO.
BATCH

JUN 8 2004


JUN 8 2004

6G246, MIL-L-10093A, TYPE II
130'79-PHILA-52-16-(51)
WT. 58 LBS. 1-5 GAL. CAN CU. 1.1
COMPOUND, FUNGUS PROOFING
FOR RETREATMENT OF LEATHER ITEMS
MIDLAND ADHESIVE & CHEMICAL CORP.
FERNDALE, MICHIGAN
FILLING DATE 12-52 BATCH NO. 33

THE FULTON SYLPHON CO.
U.S.A.
TEMPERATURE CONTROLS
METAL
BELLOWS ASSEMBLIES

JUN 8 2004


JUN 8 2004

I-531-0557

CH-2

54

SHIPBOTTOM PAINT

DARK

AND MIL-P-15450

S-005-57007

NO-BO-W-66-83078

62.5 MFG. 12/21/65

NET WT.: 58.5

GALLONS

FIREZING

CO. INC.

GSA
GENERAL SERVICES ADMINISTRATION
HINGHAM, MASS. 02043

YOUR ORDER NO. N00011220225444

SHIP TO:
BOSTON NAVAL SHIPYARD
BOSTON MASS 02129

MARK FOR
PROJECT CODE LC

GSA FORM 3527 (7-65)

MANIFEST NO. 10004867
R/S 0140
PP 4
POD
DATE 72652
AREA 17

JUN 8 2004


JUN 8 2004

WARNING!
TOXIC and
FIRE HAZARD
CONTAINS
PET. SPIRITS
AVOID INHALING, SWALLOWING OR
CONTACT WITH THE SKIN.
AVOID SPARKS, OPEN FLAME AND SPILLS.
KEEP CONTAINER CLOSED

JUN 8 2004

WARNING!

TOXIC and
FIRE HAZARD

CONTAINS

PET. SPIRITS

AVOID INHALING, SWALLOWING OR
CONTACT WITH THE SKIN.
AVOID SPARKS, OPEN FLAME AND SPILLS.
KEEP CONTAINER CLOSED

JUN 8 2004

8010-823-7910

PAINT, BLACK, POLYISOBUTYLENE
(Formula 133)

MIL-P-22298

1 GALLON NET WT. 6.72 LBS.

LENOIR WOOD FINISHING CO.
LENOIR, N. C.

ORDER NO. DA-J/33652

CONTRACT: GS-07S-10973

LOT NO. 5-2876

MANUFACTURED: NOVEMBER, 1965

JUN 8 2004


JUN 8 2004

5910-666-5524

3330-056750383
CAPACITOR
1 EACH
AF 33(038)30025
WEBSTER CHICAGO CORP
CHICAGO, ILLINOIS
DATE PKD / /55
METHOD III

JUN 8 2004


JUN 8 2004

151529 MB 10/15/56

ADDRESSOGRAPH-
MULTIGRAPH CORP.
101 EXCHANGE ST.
PORTLAND 3, MAINE

1850-512-5080

JUN 8 2004


JUN 8 2004


CH9
VEHICLE TYPE
Pyrene
FIRE EXTINGUISHER
TO OPERATE
JUN 8 2004

FIVE

GALLONS

Whiz

OIL

NEATSFOOT

SPEC. C-O-388

Order No. N1405-27568

R. M. HOLLINGSHEAD CORP.

CAMDEN, N. J., U. S. A.

Made in U. S. A.

JUN 8 2004


JUN 8 2004


JUN 8 2004


JUN 8 2004



COATING
PLAS-CHEM'S
ZINC-ITE B
INORGANIC
ZINC-FILLED
COATING
CHN
240
JUN 8 2004

N. Y.

PLAS-CHEM'S
ZINC-ITE B
INORGANIC
ZINC-FILLED
COATING

PLAS-CHEM'S
ZINC-ITE B
INORGANIC

8 2004

ZINC-ITE B
INORGANIC
ZINC-FILLED
COATING

CH
T-105
290

T-105

PLAS-CHEM'S
ZINC-ITE B
INORGANIC
ZINC-FILLED
COATING

T-106

JUN 8 2004


JUN 8 2004
THIS SIDE
NO. CTNS
DOC
DIM 14X14X10
FROM NSC NORVA
NGU/


8030-390-7965
SEALING CPD W/CATALY
4 GAL CANS
WT 48 CU
4 KITS
TOXIC
NOT DROP
JUN 8 2004


JUN 8 2004


JUN 8 2004


JUH 8 2004


DEFENSE DEPOT MECHANICSBURG
MECHANICSBURG, PENNSYLVANIA 17055
BOSTON NAVAL SHIPYARD
BOSTON MASS 02129
5
9
40
1.2
8 2004


& INSULATOR CO.
JUN 8 2004

6810-222-9645
HYDROCHLORIC ACID, TE
6XG LB BTS
PKD 9/63 LOT 3H40-

POISON

WARNING! CAUSES BURNS

Avoid contact with skin and eyes.
Avoid breathing vapors.
In case of contact, immediately flush skin or eyes with water for at least 15 minutes; get medical attention.

CHEMICAL COMPOUNDING CORP.
JERSEY CITY 4, N. J.

17-600-64-1171
WT 40 CU 1.3

6X5PYPPN
COMPLIES WITH S
PPP-B-636b

Schrader

JUN 8 2004


JUN 8 2004


ARNISH & INSULATOR COMPANY
JUN 8 2004


VARNISH & INSULATOR COMPANY
JUN 8 2004

GOODYEAR
MADE IN U.S.A.

1801-C
TOP COAT BASE CEMENT
AND 983-C ACCELERATOR
ONE GALLON UNIT

SPEC. MIL-C-74393

THE GOODYEAR TIRE AND RUBBER COMPANY

JUN 8 2004

GOODYEAR

983C ACCELERATOR

FOR CLASS I OR II MIL-C-[illegible]

JUN 8 2004



COMPOUND, FUNGUS PROOFING
FOR RETREATMENT OF LEATHER ITEMS
MIDLAND ADHESIVE & CHEMICAL CORP.
FERNDALE, MICHIGAN
FILLING DATE
11/52
TYPE II
13079-PHILA-52-16-[51]
WT. 58 LBS.
COMPOUND, FUNGUS PROOFING
FOR RETREATMENT OF LEATHER ITEMS
MIDLAND ADHESIVE & CHEMICAL CORP.
FERNDALE, MICHIGAN
12-52
JUN 8 2004

INGREDIENTS

Hydrocarbon oil	20%
Cyclohexanone	10%
Perchlorethylene	68%
Paranitrophenol	2%

CH-24
Approx
150

DIRECTIONS

Wash the leather items with soap and water at a temperature not to exceed 100°F in a washing machine or other device in which the shoes to be tumbled may be used. Remove dirt remaining after this treatment by rubbing with a cloth or a brush dipped in water. Allow leather to drain for five minutes. Rinse with clean water. Allow leather to drain for five minutes. Apply the compound by immersing the leather in the solution for 10 seconds. When only a small quantity is to be used, application may be made with a soft bristled brush, sponge, felt dauber or cloth. Apply in a well ventilated area and avoid inhaling the toxic solvent. After application wash hands thoroughly with cool water and soap. Allow leather items to dry thoroughly in the open air before wearing. Avoid skin contact.

JUN 8 2004

SHAKE BEFORE USING


JUN 8 2004


JUN 8 2004


JUN 8 2004


STOP - FIRE
JUN 8 2004


LUBE OIL, EXPOSED GEAR
GRIKOTE 31 EP
9150-935-4127
GRIKO CHEM PETS, INC.
NOV. 68
DSA600-69-C-0430
5 US GALLONS
WT 45
PROJECT
JUN 8 2004


JUN 8 2004

WESTINGHOUSE ELECTRIC & M
DISTRICT MANUFACTURING & REPA

PRIMARY VOLTS	KVA.	CYCLES
2400/4-2.5PER CENT TAPS	37.5	60
SECONDARY VOLTS	PHASE	IMP. %	POL.
240 A	3	1.5	ADD
ORDER NO.	SERIAL NO.	TYPE	FORM
	02359	OTSC	
MAKE	REBUILT BY	DATE	
KULLMAN	PROVIDENCE DISTRICT PLANT	1-44	
28611-A		MADE IN U.S.A.	

JUN 8 2004


JUN 8 2004


JUN 8 2004

TYPE [ ] TRANSFORMER PHASE

[ ] KVA CONT 55° RISE

[ ] GAL OIL TOTAL WT LBS



SERIAL NO

JUN 8 2004


CP-1
CP-1
JUN 8 2004


JUN 8 2004


JUN 8 2004


JUH 8 2004


JUN 8 2004








4 PLY POLYESTER CORD


900x16
TUBES


ORDER NO.
CTN. NO.
WEIGHT










TWO U. S. GALLONS NET
A-Prem
100% PURE
MOTOR
OIL
"Long Life Lubrication"
LENGTHENS LIFE OF ENGINE
INCREASES MOTOR'S EFFICIENCY
GUARANTEE










OT
INSULATING OIL
ELECTRICAL
FRAGILE
FPE
FEDERAL PACIFIC ELECTRIC COMPANY
DO NOT DROP


STATE
GASES
NITROUS
OXIDE


250 CAL. .30
BELTED 4 AP. ITR.
REPACKED LOT
HAVOL
TEXACO


SPRAY ENAMEL
MEDIUM GREEN
2X732
CAL. 30MI
AMMUNITION BOX
250 CAL. 30
BELTED 4 AP. ITR.
REPACKED LOT
Schrader


C65-3
CAL. 30MI
AMMUNITION BOX
250 CAL. 30
BELTED 4AP. ITR.
REPACKED LOT
HAVO
TEXA
SEALED BEAM



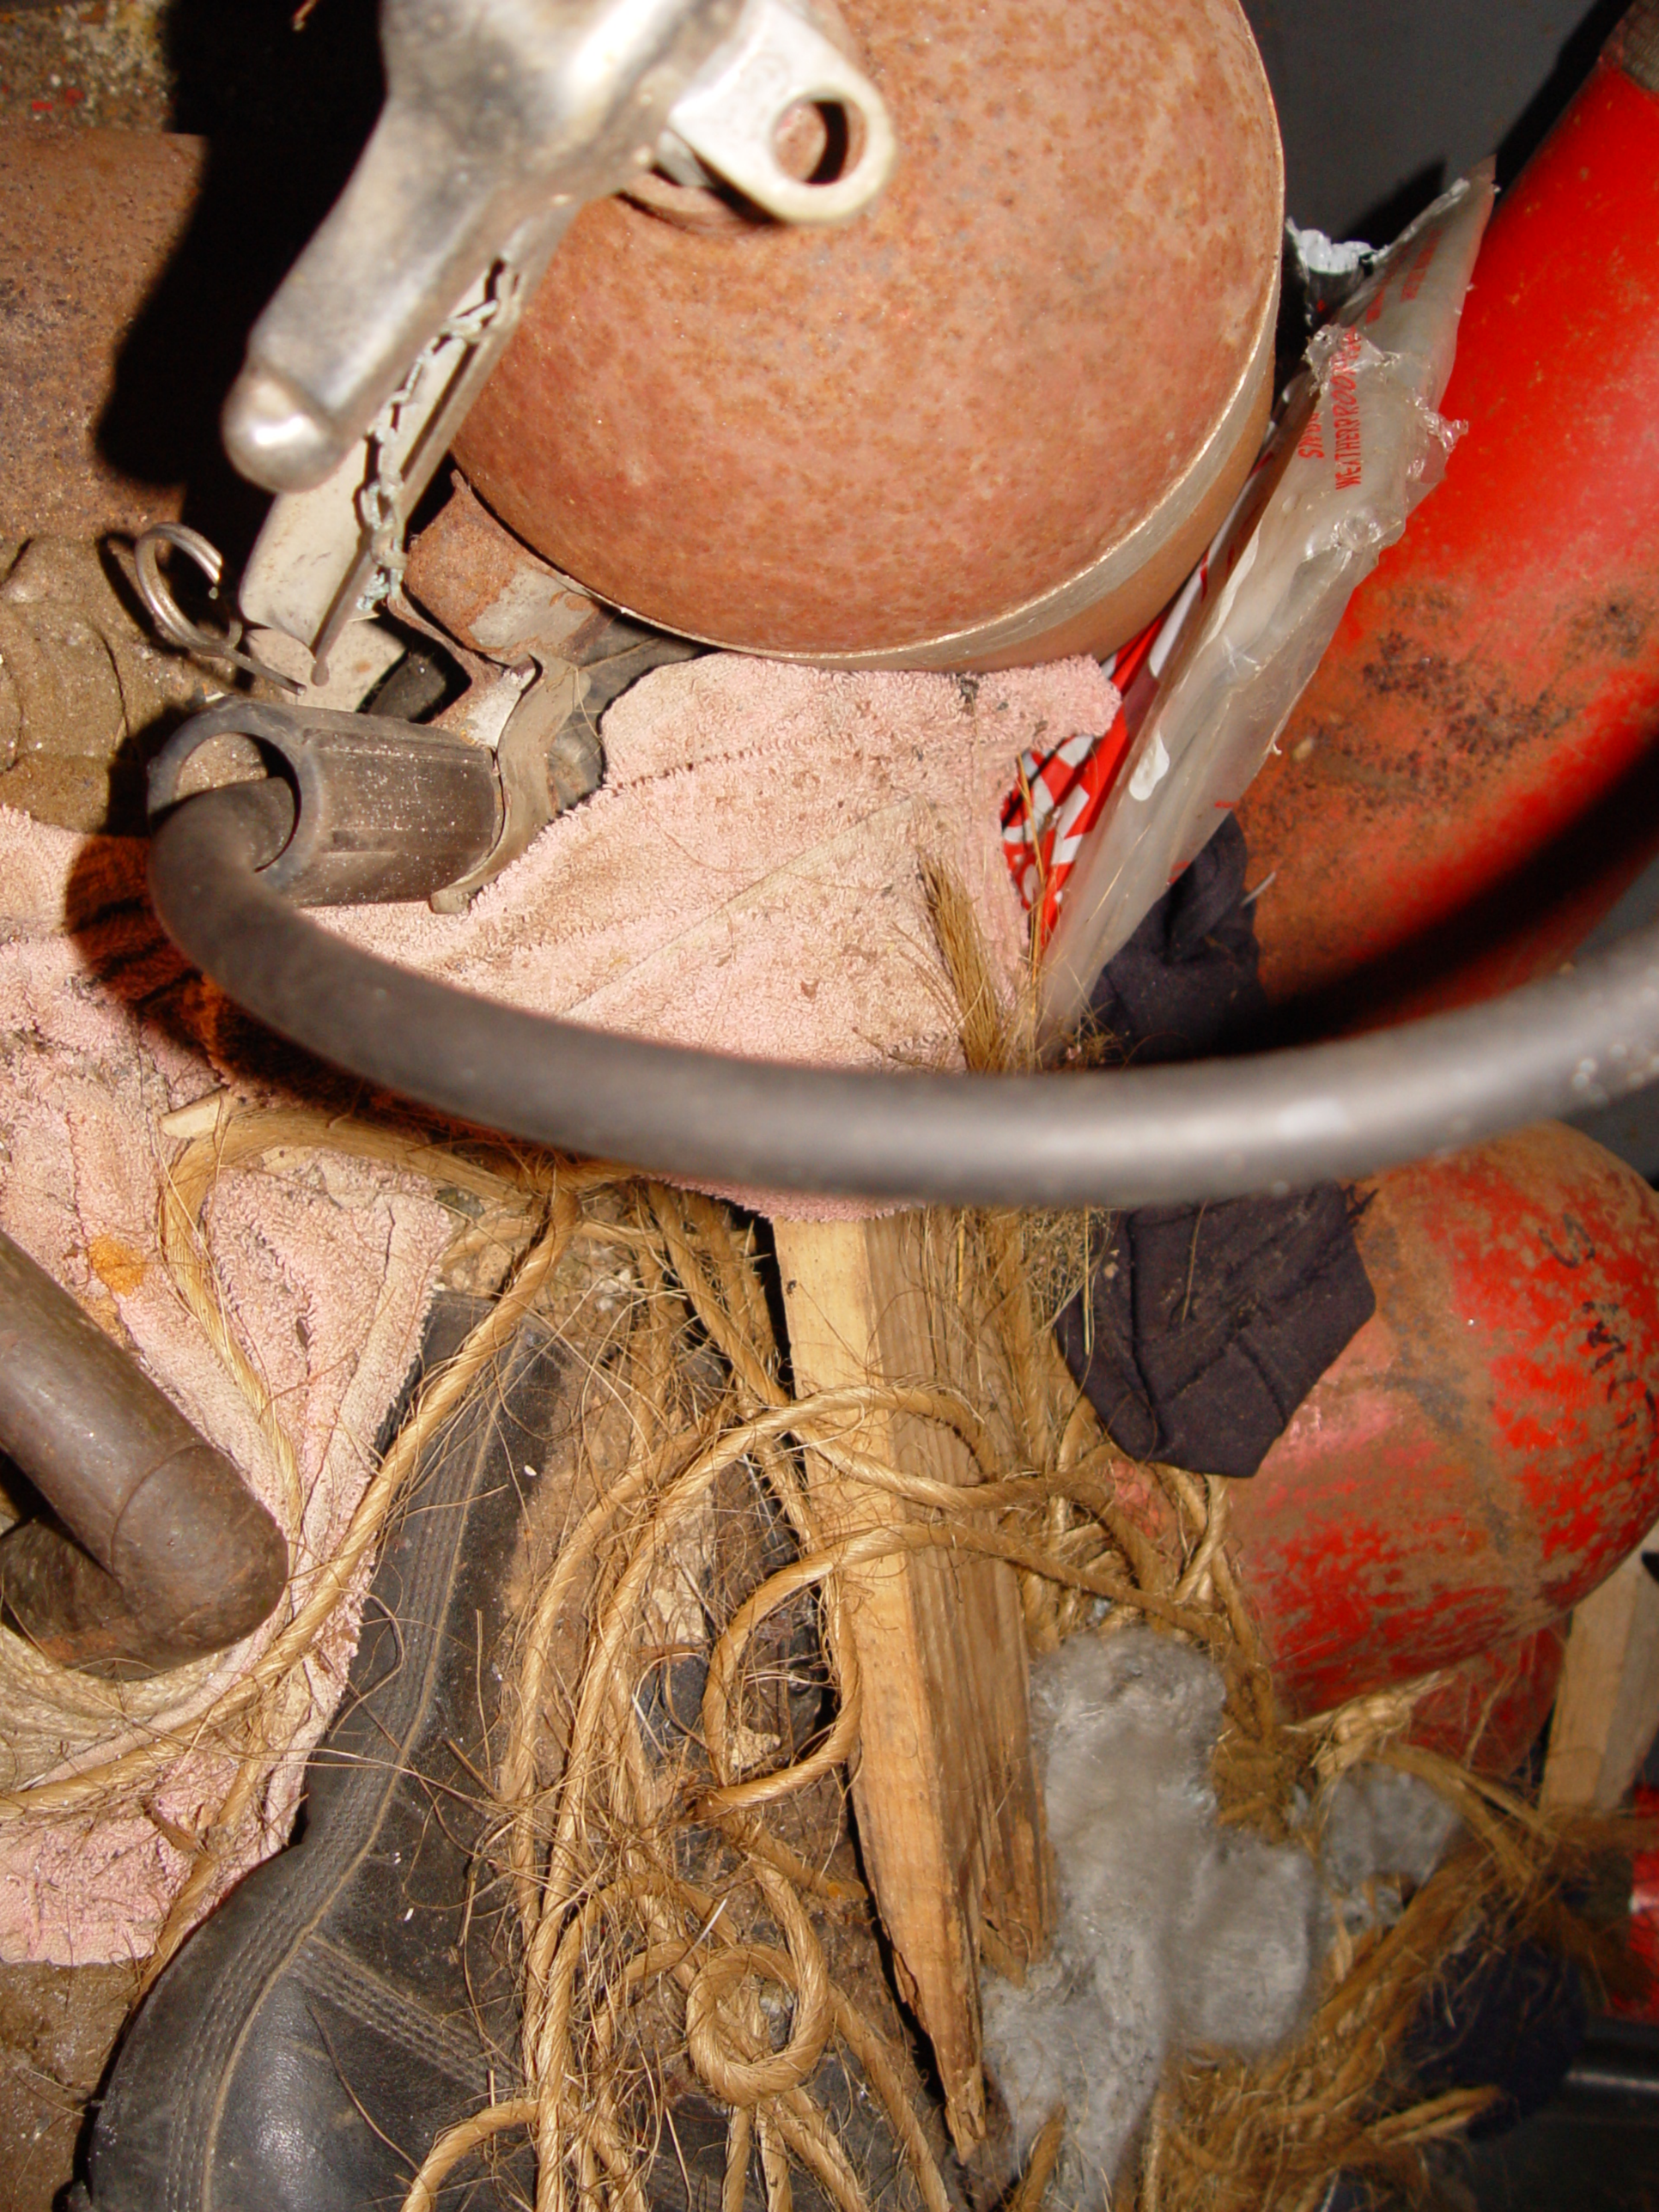


OT
INSULATING OIL
ELECTRICAL
VV-I-530 AM 2
9160-611-2000
OCTAGON PROCESS INC.
FEB/62
B 1435

OT

INSULATING OIL

ELECTRICAL

VV-I-530 AM 2

9160-611-2000

OCTAGON PROCESS INC.

B 1435

FEB/62

ASP 27019


FIRE GUA


220 GAL .50 LINKED
TAIGC
A545
LOT TW L-19462
Buffalo


SMOOTH-ON
PACIFIC BLUE




STOP




THINN
DOPE & LAC
NITRATE
TT - T - 266B
8010 - 160 - 578
BATCH 167

POISON

DO NOT USE AS FOOD CONTAINER

2-OZ.

CLEANER-RIFLE BORE

SPEC. RIXS-205 (REV. 1):

•

SHAKE WELL BEFORE USING

•

P. O. NO. (28-024) 44-40700.2

THE CURRAN CORPORATION
MALDEN, MASS.

POISON
DO NOT USE AS FOOD CONTAINER
2-OZ.
CLEANER-RIFLE BORE
SPEC. RIXS-205 (REV. 1):
SHAKE WELL BEFORE USING
P. O. NO. (28-024) 44-40700.2
THE CURRAN CORPORATION
MALDEN, MASS.






30227
C9


NOV 68




CG2 ↑ Inventory
CG-4
CLEARED
GG-1

8040-00-582-4596
ADHESIVE, RESILIENT DECK COVERING
4 GLS.
NORTON SPECIALTIES CO.
NORTON, MASS. - 02766
CONTR. NO.-
ORD. NO.- N00102-85-M-[illegible]
DATE MFD.- OC Dec '83
REINSP. DATE-
GR. WT. 36 LBS. CF 0.84
WARNING
PROTECT FROM FREEZING
STORE INDOORS
80400058245 96

8040-00-582-4596
ADHESIVE, RESILIENT DECK COVERING
4 GLS.
NORTON SPECIALTIES CO.
NORTON, MASS. - 02766
CONTR. NO.-
ORD. NO.- N00102-85-M-4674
DATE MFD.-
REINSP. DATE-
GR. WT. 36 LBS. CF 0.84
WARNING
PROTECT FROM
80400058245 96


insulating cement
insulating cement
insulating cement
ROTATE STOCK
MW CEMENT

8040-00-582-4596
NO. 702 ADHESIVE ASPHALT
WATER EMULSION TYPE
(FOR ASPHALT & VINYL ASBESTOS TILES.)
MIL-A-21016E
4-1 GAL.
STEVEN INDUSTRIES, BAYONNE, N.J.
MFG. W.W. HENRY CO., SO. RIVER, N.J.
GS-06F-12851
P.O. NO. A-W-K 0316-2
GR. WT. 37 LBS. CF. .9
LOT NO. 1635
DATE PACKAGED 4/85
TYPE 2 SHELF LIFE 12 MONTHS
INSPECTION TEST DATE 4/86
STORE AT 45° F TO 75° F.
PROTECT FROM FREEZING
STORE INDOORS

SHIP TO:

GSA SUPPLY DEPOT
3312 BERKELEY LAKE ROAD
DULUTH, GA. 30136






CAN AM
WELDING
SUPPLIES
INC.
Lowfat and happy.
With Natural 2.


Lowfat and happy.
With Natural 2.
COSCO